


W42T TUNED INPUT FILTER

by FAR CIRCUITS.

USE GREEN END FOR CATHODE FOR PULL DOWN RELAY ACTIVATION

USE RED END FOR CATHODE FOR PULL UP RELAY ACTIVATION

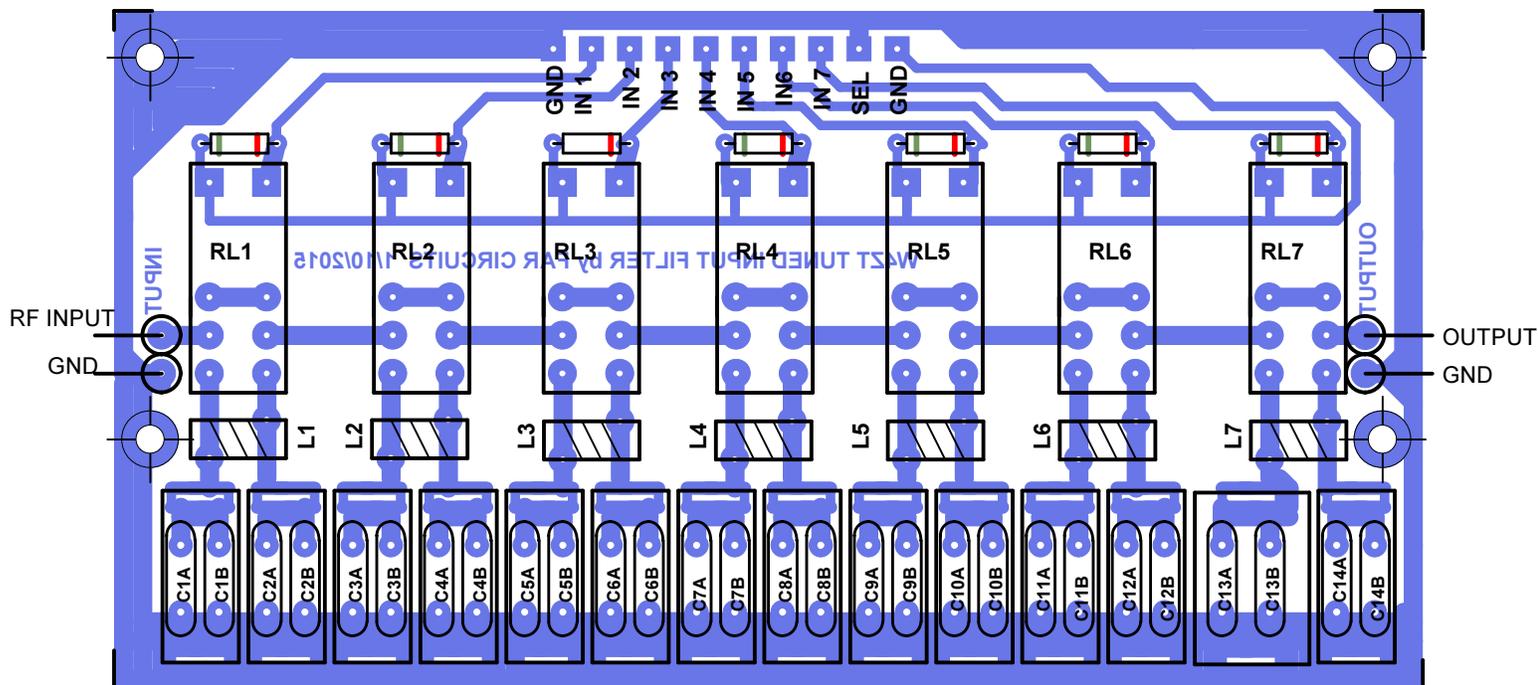

THE BOARD IS LAYOUT FOR COMPRESSION TRIMMER CAPACITORS OR DISC CAPACITORS

THE COILS L1 THRU L7 ARE WOUND ON T50-6 (YELLOW)

RELAYS ARE FTR-1CA012V OR G2R-24-DC12 5A @250 VAC CONTACT RATING.

FOR NEG (PULL DOWN) RELAY ACTIVATION, TIE SEL TO +12VDC

FOR POSITIVE (PULL UP) RELAY ACTIVATION, TIE SEL TO GND

NOTE DIODE POLARITY IS DIFFERENT FOR PULL UP OR PULL DOWN RELAY ACTIVATION

BOARD SIZE 3.5" BY 7.85"